


Iris & Face Recognition Reader

iA1000




Iris - Face
Fusion
Identification

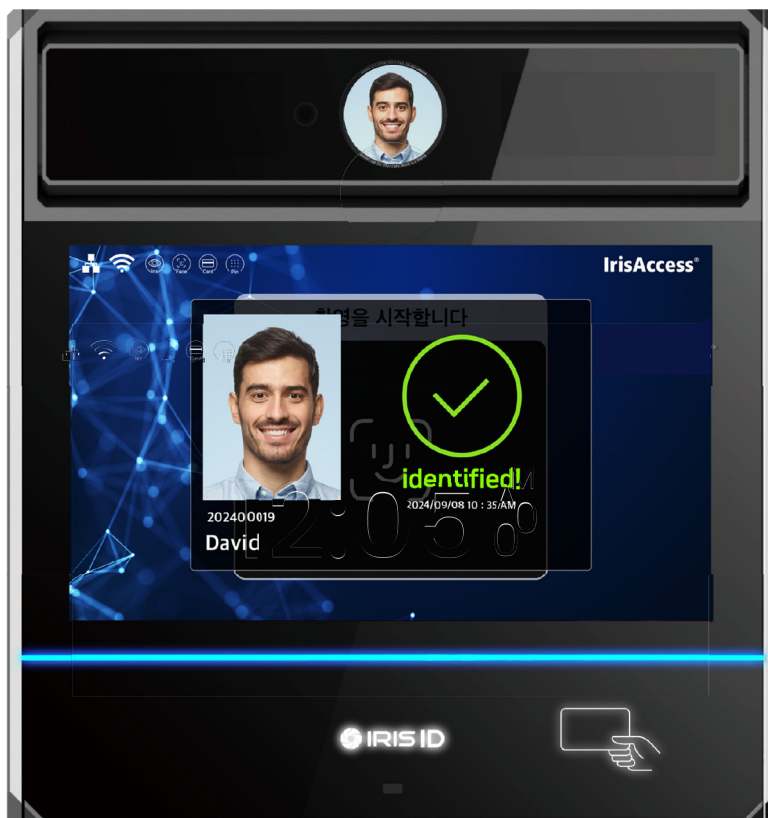

Presentation
Attack
Detection
(PAD)



Intuitive
User Interface



Enhanced
Capture Range








Advanced
Security

The IrisAccess® iA1000 series is Iris ID's latest non-contact access control device that captures and authenticates the iris and face simultaneously. The latest generation optical system provides a fast and simple user interface on a circular LCD, resulting in accurate biometric image acquisition and faster authentication. It also provides industry leading security including Presentation Attack Defense (PAD).

The IrisAccess® iA1000 series is available in two configurations, with each model featuring dual iris and face cameras, along with a new circular user guidance display. Both models are equipped with a touchscreen LCD, Wi-Fi and PoE capabilities, and support OSDP and Wiegand protocols. Optionally, there is an advanced built-in card reader that supports multiple card formats and mobile credentials.

Features

- 
IRIS - FACE Fusion
 Operates in Iris only, Face only, Iris and/or Face, Iris-Face fusion mode.
- 
Presentation Attack Detection (PAD)
 A proven set of anti-spoof measures that continue to set the standard for the industry is included.
- 
Intuitive User Feedback LCD
 A new circular LCD built into the optical system provides user guidance for fast authentication.
- 
Accommodates All User Heights
 The optical system automatically adjusts for user heights and is ADA 508 compliant.
- 
Enhanced Capture Range
 Wide recognition range of Iris 30–60 cm (12–24") & Face 30–80 cm (12–32").

- 
Simultaneous Biometric Capture
 Automatically captures dual irises and face simultaneously at the same distance.
- 
Non-Contact & Easy Authentication
 Automatically captures faces and irises up to 60 cm (24 inches).
- 
Standards Compliant
 IEC 62471:2006, UL 294, CE, FCC, KC, ROHS, UKCA
- 
Advanced Security
 Supports comprehensive data encryption, advanced network security, and secure boot.


Specifications

Dimensions (W x H x D)	18.8 cm x 19.9 cm x 3.4 cm (7.4" x 7.8" x 1.3")	Operating Range	Iris Camera: 30 – 60 cm (12–24") / Face Camera: 30–80 cm (12–32")
Weight	810 g (1.8 lbs)	Tilt	Auto tilt, -30° – +30°
Type	Walk-up	Algorithms	Iris recognition, Face recognition, Iris/Face PAD, Lens detection, Face mask, Eyeglasses detection
Power Input	24 VDC or PoE+	Real Time Clock	Rechargeable battery
Display	Main Display : 7" LCD and Selfie Display: 3.9 cm (1.54") circular LCD	Connectivity	Ethernet, Wi-Fi, BLE (optional)
User Interface	Self-guidance with visual displayed	Proximity Detection	ToF Sensor
SELinux	Linux	Card Reader	Prox card reader (125kHz), HID card reader (13.56MHz) – iCLASS, SEOS MIFARE®/DESFire® card supported
Operation	All combinations of Iris, Face, Pin, Card (And/Or Fusion)	Relay	2-Dry contact for door
User Capacity	Up to 100,000 users	Wiegand	Wiegand In/Out (flexible up to 200 bits and pass through to the access panels)
Transactions	Up to 1,000,000 on device (up to 100,000 with audit face images)	PoE+	IEEE802.3at compliant, 30 watts
Encryption	AES-256	Serial	RS232 / RS485(OSDP) / RS422
Platform Security	Secure Boot, Root of Trust, SELinux	Indicator	Multi Color LED for power and user guiding
Matching Speed	Less than 1 sec	Certifications	FCC, CE, KC, UKCA, UL294, IATA, KISA, Eye Safety
Languages	Supports multiple languages/characters simultaneously	Temperature	Operating: 0 – 45 °C (32–113 °F)/Storage: -20–90 °C (-4–194 °F)
Iris Camera	2 x 5 MP B/W CMOS image sensor		
Face Camera	13 MP Color CMOS image sensor		

Model

Model	LCD	PoE	Wi-Fi	Prox 125kHz	MIFARE® /HID DESFire® (SEOS/iCLASS) 13.56MHz	OSDP	SELinux
iA1000-WPN	✓	✓	✓	---	---	---	✓ Linux
iA1000-WPH	✓	✓	✓	✓	✓	✓	✓ Linux

Capture Volume

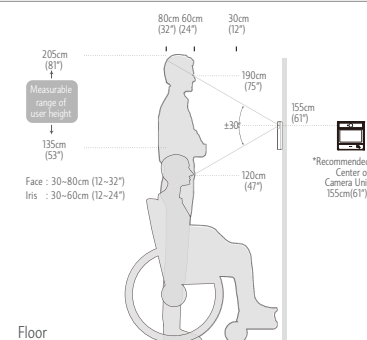

Note: The iA1000 camera can be installed at a height which accommodates the user base.

IrisAccess® Management Suite (iA-MS™)

iA-MS™ provides a centralized web-based application for managing iA1000 devices, users, and transaction logs. It offers a user-friendly graphical interface (GUI) that simplifies configuration and monitoring tasks, making it accessible to both technical and non-technical users. Using REST APIs, the application enables real-time data exchange and efficient management of iA1000 devices. Operators can easily authenticate and activate iA1000 devices, track activities, and review transaction logs, all from an intuitive interface that requires minimal training. This solution is ideal for enterprise level applications to provide device and user management from a single or multiple locations to meet your access control needs.

Use Cases

- 
 Access Control
- 
 Laboratory
- 
 Healthcare
- 
 Manufacturing
- 
 Construction
- 
 Large Scale ID
- 
 Public Security



Iris ID Systems, Inc.
 8 Clarke Drive, Cranbury, NJ 08512, USA Tel. +1-609-819-4747 Fax. +1-609-819-4736
www.irisid.com | sales@irisid.com



© 2024 Iris ID Systems, Inc. All rights reserved. Design and specification subject to change without notice.

IRIS ID AUTHORIZED RESELLER